


#### HIGH FLOW YOKE ADAPTERS

<b>5888-6</b>	3/8 SAE Flare
<b>5888-6S</b>	3/8 ODS
<b>5888-8</b>	1/2 SAE Flare
<b>5888-D</b>	1/2 - 14 NPT (male)
<b>5888-E</b>	1.030 - 14 NGO (male)

#### GASKETS FOR YOKE ADAPTERS

<b>P10-CLAL</b>	Lead Outlet Gasket (.937 OD)
<b>P10-CLBL</b>	Lead Outlet Gasket (.531 OD)

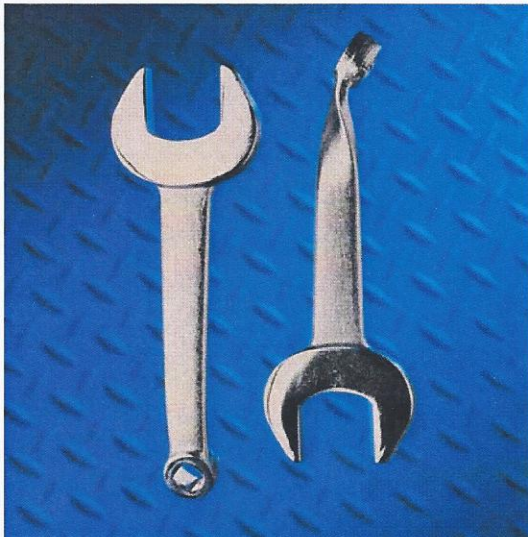

#### WRENCHES

- Designed for use with 1210/1214 and 1210A/1214A chlorine valves and yokes.
- Forged steel construction.
- 1 1/4 open end; 3/8 stem square.

<b>635</b>	Straight Shaft
<b>635X3</b>	Twisted Shaft

#### 1534 / 1534A RESEATING TOOL

Increase the life of the valve with easy to use, manually operated, reseating tool.

**1534** For use with 1210 and 1214.  
**1534A** For use with 1210A and 1214A.



#### 5928 CHARGING VALVE

The **5928** valve is a modification of Sherwood's ton container valve. A chlorine adapter is soldered on the outlet to permit yoke attachment to all standard chlorine cylinder valves. A standard CGA 660 outlet connection has been machined where the cylinder inlet normally is to permit connection to the permanent chlorine charging or discharge line.